


Tapes & Straps

Self-Adhesive Fastening Tape

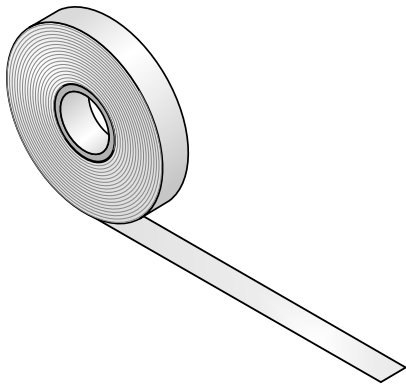

Applications

Fastening of heating cable to high temperature pipes.
Compatible with all heating cable types.

Technical Data

Length	33 m
Width	11 mm
Permanent exposure temperature	200 °C
Recommended installation temperature	Not lower than -15 °C
Adhesive material	Modified silicone


Approvals

This product is exempt from mandatory certification.

Types

Name	Order code
Fastening tape FT/HTM	7090200000

Self-Adhesive Aluminum Fastening Tape

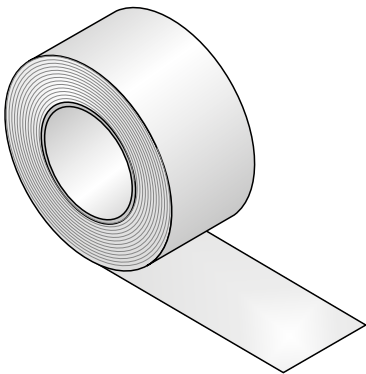

Applications

Fastening of heating cable onto flat surfaces, e.g. tanks, or onto a valve / pump body, padding of heating cables laid onto plastic pipes.

Technical Data

Length	50 m
Width	50 mm
Permanent exposure temperature	110 °C
Recommended installation temperature	Not lower than -5 °C
Adhesive material	Acryl


Approvals

This product is exempt from mandatory certification.

Types

Name	Order code
Self-adhesive aluminum fastening tape	7090200001

Fastening Band

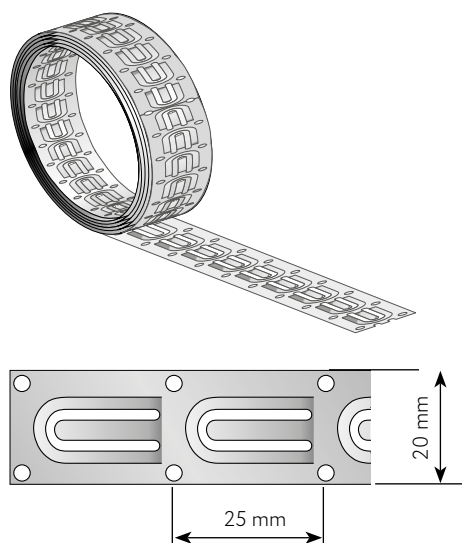

Applications

Fastening of cable to a tank.

The fastening tape is fastened onto a tank using KP101 brackets or PFS straps.

Coil length upon request.

Types

Name	Order code
Fastening Tape 25 - 10m	7090200058
Fastening Tape 25 - 20m	7090200059
Fastening Tape 25 - 30m	7090200060

Approvals

This product is exempt from mandatory certification.

Straps for Mounting Junction Box Brackets Onto a Pipe


The strap is intended for mounting junction box brackets directly onto the surface of a heated system (pipe, tank) and also for mounting heating sections based on MOIC-M cables with mineral insulation. The kit contents make it possible to assemble worm

drive straps of the required diameter in a short time without the use of special tools. With the help of the strap, parts can be mounted onto structures and equipment of any shape and size.

Material – stainless steel.

Features

- Quick-action lock allows to mount the strap without the use of special tools, simplifying and speeding up the installation process
- High strength and corrosion resistance
- Highly reliable installation
- Packaging convenient for storage and transportation



Fasteners for PFS/30 Strap

Metal lock with a screw for tightening the strap. Intended for reliably connecting worm drive straps of the required diameter. The fasteners are universal and can be used both for creating small-diameter straps and for mounting large-sized parts. Allow to connect the strap's two loose ends. A small overlap is recommended when mounting the strap.

Material – stainless steel.

Approvals

This product is exempt from mandatory certification.

Types

Name	Order code
Fixing strap PFS/3 (3 m incl. 8 fixing elements)	7090200301
Fixing strap PFS/30 (30 m)	7090200302
Fixing element	–

Part name	Length, m	Width, mm	Type of band	Weight, kg	Type of packaging	Delivery kit, pcs.
PFS/3	3	12.7	Hose strap	0.3	Blister pack	Strap – 1 pc. Fastening element – 8 pcs.
PFS/30	30	9	Hose strap	1.447	Plastic reel	Strap – 1 pc. Fastening element – to be ordered separately / not included in the package.